

▶ TDS-IGD21


ELEVATOR TRACTION MACHINE

Suspension 1 : 1
 Max.Static Load 6000kg
 Control VVVF
 DZE-9EA Brake DC110V 1.5A
 Weight 610kg

▶ TECHNICAL DATA

Spec	Capacity (Kg)	Speed	Power (Kw)	Pole	Gear Ratio	Power Source (Vac)	Current (A)	Motor Speed	Sheave Dia (mm)	Rope Dia (mm)	No Of Ropes (#)	Pitch
TDS-IGD21-61P0-13MM	680	1.0	5.5	4	75:2	380	11.5	1360	530	13	4	20
TDS-IGD21-61P7-13MM	680	1.7	8.5	4	47:2	380	17	1465	530	13	4	20
TDS-IGD21-62P0-13MM	680	2.0	11	4	61:3	380	21.0	1465	530	13	4	20
TDS-IGD21-80P5-13MM	884	0.5	5.5	6	53:1	380	12	960	530	13	5	20
TDS-IGD21-81P0-13MM	884	1.0	8.5	4	75:2	380	17	1360	530	13	5	20
TDS-IGD21-81P7-13MM	884	1.7	11	4	47:2	380	21.5	1465	530	13	5	20
TDS-IGD21-80P5-13MM	884	0.5	15	4	61:3	380	29	1465	530	13	6	20
TDS-IGD21-100P5-13MM	1020	0.5	5.5	6	53:1	380	12	960	530	13	5	20
TDS-IGD21-101P0-13MM	1020	1.0	8.5	4	75:2	380	17	1360	530	13	5	20
TDS-IGD21-101P7-13MM	1020	1.7	15	4	47:2	380	29	1465	530	13	5	20
TDS-IGD21-102P0-13MM	1020	2.0	15	4	61:3	380	29	1465	530	13	6	20

▶ MACHINE'S DIMENSION

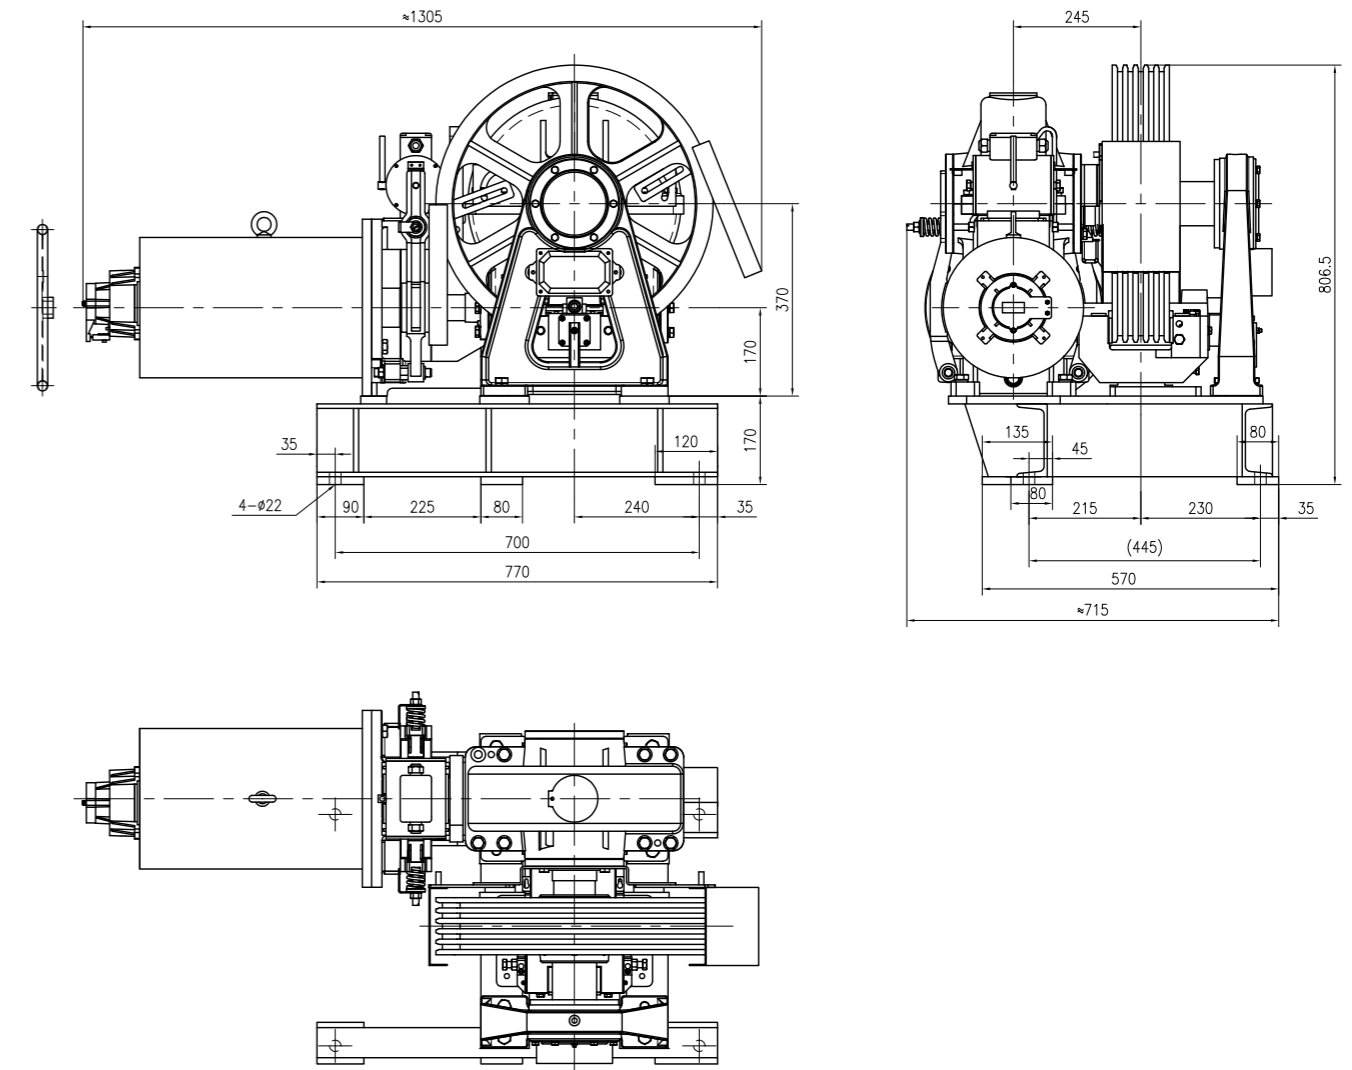

REMARK

- 1.As shown is right sheave type, left sheave type is optional.
- 2.Handwheel Φ500 for motor≥15KW, others are Φ320.
- 3.The user only needs to adopt the single support voltage to control the emergency brake, in view of the emergency brake with the excitation device.