


► TDS-IGD39

ELEVATOR TRACTION MACHINE

Suspension	1 : 1
Max.Static Load	9000kg
Control	VVVF
DZE-12E Brake	DC110V 2A
Weight	1000kg



► MACHINE'S DIMENSION

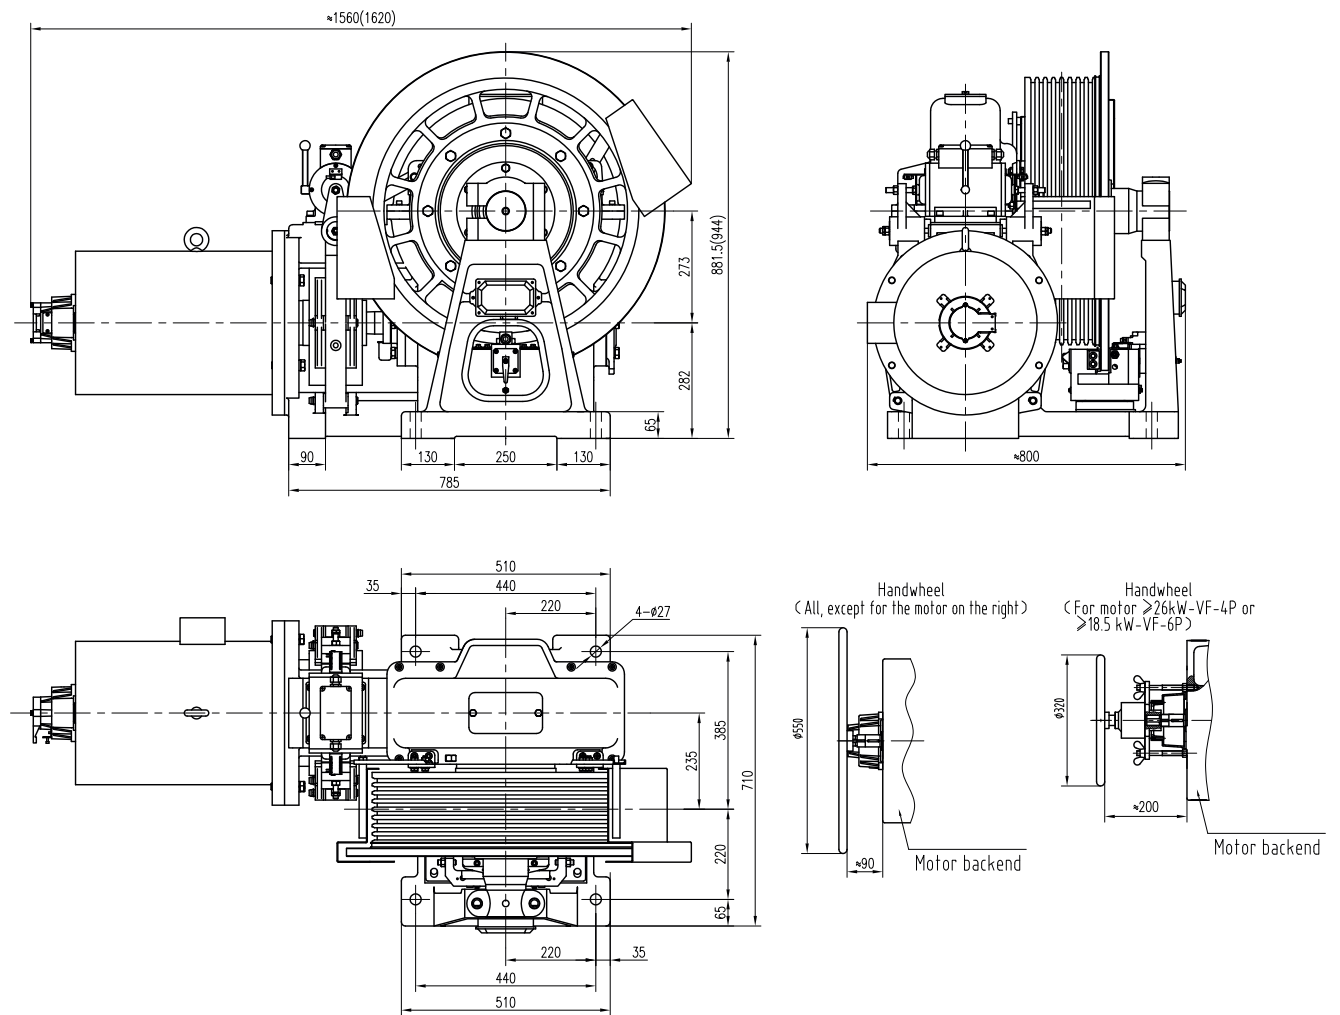

► TECHNICAL DATA

Spec	Capacity (Kg)	Speed	Power (Kw)	Pole	Gear Ratio	Power Source (Vac)	Current (A)	Motor Speed	Sheave Dia (mm)	Rope Dia (mm)	No Of Ropes (#)	Pitch
TDS-IGD39-110P5-13MM	1156	0.5	7.5	6	59:1	380	17	900	650	13	6	20
TDS-IGD39-111P0-13MM	1156	1.0	11	6	59:2	380	25	900	650	13	6	20
TDS-IGD39-111P7-13MM	1156	1.7	18.5	4	57:2	380	35	1440	650	13	8	20
TDS-IGD39-112P0-13MM	1156	2.0	22	4	49:2	380	41	1440	650	13	8	20
TDS-IGD39-120P5-13MM	1224	0.5	7.5	6	59:1	380	17	900	650	13	6	20
TDS-IGD39-121P0-13MM	1224	1.0	15	6	59:2	380	32	900	650	13	6	20
TDS-IGD39-121P7-13MM	1224	1.7	22	4	57:2	380	41	1440	650	13	8	20
TDS-IGD39-122P0-13MM	1224	0.5	26	4	49:2	380	48.5	1440	650	13	8	20
TDS-IGD39-110P5-13MM	1360	0.5	7.5	6	59:1	380	17	900	650	13	6	20
TDS-IGD39-111P0-13MM	1360	1.0	15	6	59:2	380	32	900	650	13	6	20
TDS-IGD39-111P7-13MM	1360	1.7	22	4	57:2	380	41	1440	650	13	8	20
TDS-IGD39-112P0-13MM	1360	2.0	26	4	49:2	380	48.5	1440	650	13	8	20
TDS-IGD39-120P5-13MM	1600	0.5	11	6	59:1	380	25	900	650	13	8	20
TDS-IGD39-121P0-13MM	1600	1.0	18.5	6	59:2	380	39	900	650	13	8	20
TDS-IGD39-121P7-13MM	1600	1.7	26	4	57:2	380	48.5	1440	650	13	8	20
TDS-IGD39-122P0-13MM	1600	0.5	30	4	49:2	380	55.5	1440	650	13	8	20

REMARK

- 1.As shown is right sheave type, left sheave type is optional.
- 2.The user only needs to adopt the single support voltage to control the emergency brake, in view of the emergency brake with the excitation device.
- 3.The dimension in bracket is applied to the machine with emergency brake.